
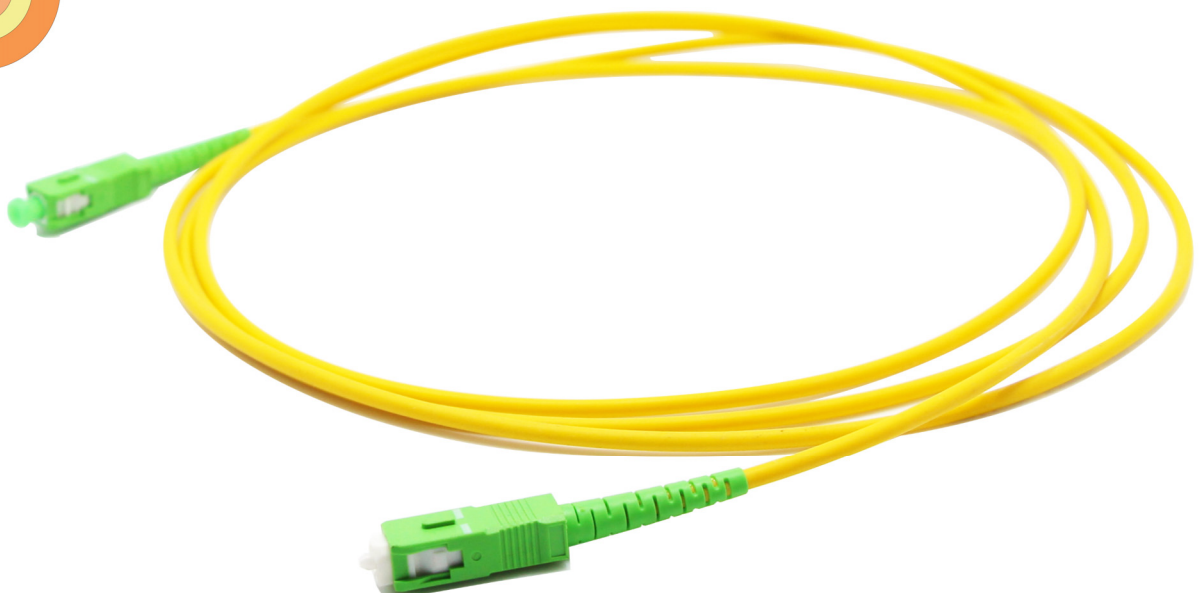


DATASHEET

Standard Simplex Fiber Patch Cables

Make High-speed Optical network Racks&equipment Connections.



IL<0.3dB Max



RoHS



OMC INDUSTRY CO.LIMITED

2018|En version1.0



Standard Simplex Fiber Patch Cables

Description

The patch cord can be used in interconnect or cross-connect path connecting the incoming fibers to the electronic equipment and providing patching within the fiber paths.

OMC's Patch cables are manufactured and tested in compliance with TIA 604 (FOCIS), IEC 61754 and YD/T industry standards. OM1, OM2, OM3, OM4, OM5 or OS2 fiber types to meet the demand of Gigabit Ethernet, 10 Gigabit Ethernet and high speed Fiber Channel. Every termination through rigorous parameter test to ensure the highest in network performance.

Products Materials



G652D, G657A1, G657A2/B2, G657B3, OM1, OM2, OM3, OM4, OM5 Fibers
900um, 1.2mm, 1.6mm, 1.7mm, 1.8mm, 2.0mm, 2.4mm, 2.6mm, 2.8mm OD cable
PVC (Riser/OFNR), LSZH, Plenum (OFNP) Jacket materials



High quality SM Ceramic ferrule, Good concentricity < 0.5um
High quality MM Ceramic ferrule, Good concentricity < 4.0um



Standard connectors LC, SC, ST, FC, E2000, MU, D4, Din, LX.5, SMA are available
High precious connector guarantee Good Repeatability and Interchangeability
OEM Housing kits Color, OEM boot Colors
Customized Design for special demand

Standard Compliance

- TIA 604 (FOCIS)
- TIA/EIA 492AAAE
- IEC 61754
- IEC 60793-2-10
- IEC 61300-3-35
- YD/T1272.1-2003
- RoHS, ISO9001 Compliant

Features

- High quality zirconia ferrules.
- Good repeatability and interchange.
- Flame-retardant, rugged and durable jacket.
- 100% optically tested for insertion loss to ensure high quality

Application

- Data Center
- Enterprise
- Fiber to the X (FTTX)
- LAN and WAN
- CATV Network
- Telecommunications Network

Connector Type

LC

Standard, Uniboot.
Typical Applications:
High-density connections, SFP and SFP+ transceivers, XFP transceivers.



SC

Standard boot, Short boot
Typical Applications:
Telecom; GPON; EPON; GBIC.



FC

Standard boot
Typical Applications:
Datacom, Telecom, measurement equipment, single-mode lasers



ST

Standard boot
Typical Applications:



Connector Type

E2000

Huber+Suhner,R&M,Diamond
Typical Applications : Telecom,
DWDM



MU

Standard boot
Typical Applications:
LAN,



D4

Standard boot



DIN

Standard boot



Connector Standard

SC: TIA/EIA, FOCIS3, GR-326.NTT-SC IEC61754-4 and JIS C5973.

LC: TIA/EIA, FOCIS10, GR-326 EIA/TIA-604-10, IEC61754-20 and JIS C5973.

FC: EIA /TIA-604-04, FOCIS4, NTT-FC, GR-326. IEC61754-13 and JIS C5973

ST: TIA/EIA, FOCIS2, GR-326. IEC61754-2 and JIS C5973 Etc.

MU: TIA/EIA-604-3A, GR-326.NTT-MU, JIS and IEC.

MTRJ: TIA/EIA, FOCIS12, GR-326. IEC and JIS C5973.

DIN: IEC61754-3

Optical Specifications

Insertion loss	≤0.25dB Mean (Standard)	Interchangeability	≤0.2dB
Return loss	SM UPC≥50dB SM APC≥60dB MM PC≥35dB	Vibration	≤0.2dB
Operating temperature	-40~75°C	Maximum pulling force	70N(2.0mm cable) 100N(3.0mm cable)

Geometric Specification(if Customer requested)

Items		Parameter	
Polishing		PC	APC
ROC	SC/FC/ST	10 ~ 25mm	5 ~ 12mm
	LC/MU	7~ 25mm	5 ~ 12mm
Apex Offset		≤ 50um	
Fiber Spherical Height		±100nm	
Angle		—	8 ± 0.5

Polishing Method

UPC(Ultra-Polished connector)




APC(8 Angled Polished connector)



Polishing End-face



SM UPC



SM APC



MM PC

End-face Quality (SM)


Zone	Range (μm)	Scratches	Defects	Reference
A: Core	0 to 25	None	None	IEC 61300-3-35:2015
B: Cladding	25 to 115	None	None	
C: Adhesive	115 to 135	None	None	
D: Contact	135 to 250	None	None	
E: Rest of ferrule		None	None	

End-face Quality (MM)

Zone	Range (μm)	Scratches	Defects	Reference
A: Core	0 to 65	None	None	IEC 61300-3-35:2015
B: Cladding	65 to 115	None	None	
C: Adhesive	115 to 135	None	None	
D: Contact	135 to 250	None	None	
E: Rest of ferrule		None	None	

Length Tolerance

Overall Length(L)(m)	length of tolerance(cm)
0<L<1	+5/-0
1<L<10	+10/-0
10<L<40	+15/-0
40<L	+0.5% x L/-0

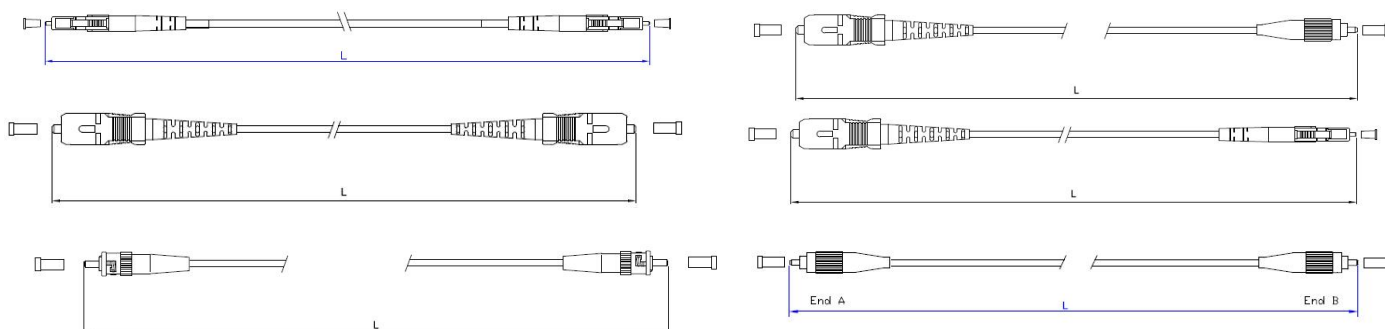

Packaging

This easily taken and well-protected fiber patch cable package has been labelled and marked by OMC as default. Standard carton size : 34*22*15 cm; 44*34*24 cm ; 54*39*34 cm . Which carton to be used depends on goods Qty . Packing can be customized.



1,Self-seal PE Bag

2 Bubble Bag

3, Paper Carton

4,fumig-free Pallet

- OME service** {
1. Cable color, printing word, material of cable jacket, connector's color
 2. OEM Label, Identify ring, cable's label, box, shipping marks
 3. Different quality Level.

Order Instruction

Patch cord	Fiber count	Fiber Grade	Connector A	Connector B	Cable OD	Out jacket	Cable Color	length
A	S1 - Simplex Standard Quality, No Geometric request	1 - G652D	A LC UPC	A LC UPC	1 - 0.6mm	H- LSZH	A Blue	1=1m ...
		2 - G657A1	B SC UPC	B SC UPC	2 - 0.9mm	C - PVC	B Orange	
		3 - G657A2/B2	C FC UPC	C FC UPC	3 - 1.2mm	R - OFNR	C Green	
		4 - G657B3	D ST UPC	D ST UPC	4 - 1.6mm	P - OFNP	D Brown	
	S2 - Simplex Standard Quality, Geometric passed request	5 - OM1	E LC APC	E LC APC	5 - 1.7mm		E Grey	
		6 - OM2	F SC APC	F SC APC	6 - 2.0mm		F White	
		7 - OM3	G FC APC	G FC APC	7 - 2.4mm		G Red	
		8 - OM4	H ST APC	H ST APC	8 - 2.6mm		H Black	
		9 - OM5	I E2000 UPC	I E2000 UPC	9 - 2.8(3.0)mm		I Yellow	
			J E2000 APC	J E2000 APC			J Purple	
			L DIN UPC	L DIN UPC			K Pink	
			M DIN APC	M DIN APC			L aqua	
			N D4	N D4			M Magenta	
			O MU UPC	O MU UPC			X- other	
			P MU APC	P MU APC				
			R LX.5 UPC	R LX.5 UPC				
			S LX.5 APC	S LX.5 APC				

Transmission Distance Comparison

Data Rate	Interface Type	Fiber Mode	Wavelength	Maximum Distance
1G	1000BASE-LX	OM5	850nm	550m
		OM4	1300nm	550m
		OM3	1300nm	550m
		OM2	1300nm	550m
		OM1	1300nm	550m
		SMF	1310nm	10km
	1000BASE-SX	OM4	850nm	550m
		OM3	850nm	550m
		OM2	850nm	550m
		OM1	850nm	275m
10G	10GBASE-SR	OM4	850nm	400m
		OM3	850nm	300m
		OM2	850nm	82m
		OM1	850nm	33m
	10GBASE-LRM	OM5	850nm	220m
		OM3	1300nm	220m
		OM2	1300nm	220m
		OM1	1300nm	220m
	10GBASE-LR	SMF	1310nm	10km
	10GBASE-ER	SMF	1550nm	30-40km
	10GBASE-ZR	SMF	1550nm	80-100km
40G	40G-BIDI	OM5	850nm	200m
		OM4	850nm	150m
		OM3	850nm	100m
	40GBASE-SR4	OM5	850nm	150m
		OM4	850nm	150m
		OM3	850nm	100m
	40G-SWDM4	OM5	850nm	440m
		OM4	850nm	350m
		OM3	850nm	240m
	40GBASE-LR4	SMF	1310nm	10km

Transmission Distance Comparison

Data Rate	Interface Type	Fiber Mode	Wavelength	Maximum Distance
100G	100GBASE-SR4	OM5	850nm	100m
		OM4	850nm	100m
		OM3	850nm	70m
	100G-SWDM4	OM5	850nm	150m
		OM4	850nm	100m
		OM3	850nm	75m
	100GBASE-SR10	OM4	850nm	125m
		OM3	850nm	100m
	100GBASE-LR4	SMF	1310nm	10km
	100GBASE-ER4	SMF	1310nm	40km

How to Choose The Right Fiber Optic Cable Type?

Designation	Fiber Dia. (μm)	Type	Fast Ethernet 100BASE-FX	1 Gigabit Ethernet 1000BASE-SX	1 Gigabit Ethernet 1000BASE-LX	10Gbps Ethernet 10GBASE	40Gbps Ethernet 40GBASE SR4	100Gbps Ethernet 100GBASE SR4
OM1	62.5/125	Multi-mode	2000 Meters	275 Meters	550 Meters	33 Meters	Not supported	Not supported
OM2	50/125	Multi-mode	2000 Meters	550 Meters	550 Meters	82 Meters	Not supported	Not supported
OM3(Laser Optimized)	50/125	Multi-mode	2000 Meters	550 Meters	550 Meters	300 Meters	100 Meters (SR4)	100 Meters (SR4)
OM4(Laser Optimized)	50/125	Multi-mode	2000 Meters	550 Meters	550 Meters	400 Meters	150 Meters (SR4)	150 Meters (SR4)
Singlemode	9/125	Single-mode	2000 Meters	5km at 1310nm	5km at 1310nm	10km at 1310nm	N/A	N/A

PS: The difference of OM4 and OM3 fiber mode as the following

1. OM4 was developed specifically for VCSEL laser transmission and allows 10 Gig / second link distances of up to 550 Meters (compared to 300M with OM3).
2. The effective modal bandwidth for OM4 is more than double that of OM3.
3. For OM4 patch cable it is 4700 MHz.km while for OM3 it is 2000 MHz.km.